


INDUSTRIAL HYDRAULIC EQUIPMENT

REMOTE MOUNTED DIRECTIONAL CONTROL



Valve Operation	Valve Type	Use With Cylinder	Model Number	Hydraulic Symbol	Schematic Flow path			Weight (lbs)	
Manual	3-way, 3 position, Tandem center	Single Acting	PR33	A P T	A P T	A P	A P T	3.53	•
	3-way, 3 position, Closed center		PR33C	A P T	A Q P	A P	A P T	3.53	•
	3-way, 3 position, Tandem center, Locking		PR33L	A D D D D D D D D D D D D D D D D D D D	A P T	A P	A P T	5.73	
	3-way, 3 position, Closed center, Locking		PR33CL		A Q O	A P †	A P T	5.73	
	4-Way, 3 position, Tandem center	- Double Acting	PR43	A B P T	A Q B	A B B	A B B	3.53	
	4-Way, 3 position, Tandem center, Locking		PR43L		•		+	5.73	
	4-Way, 3 position, Closed center		PR43C	A B P T	A Q B	A B B	A B B	3.53	
	4-way, 3 position, Tandem, Closed center, Locking		PR43CL	A B P P P P P P P P P P P P P P P P P P	A B B	A B B	A D B	5.73	

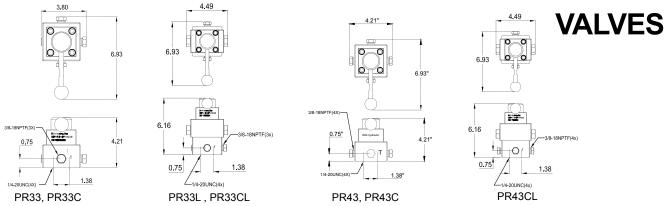

PR33



PR43C



PR43L