


DOUBLE ACTING AIR PUMP

- High strength metal reservoir is durable and corrosion resistant.
- Suggested air pressure range: 110-175 psi (7.5 – 12 bar)
- Maximum working pressure: 10,000 psi (700 bar)



PA1500M

- PA1500M offers a 4-way control valve for operation of double acting cylinders

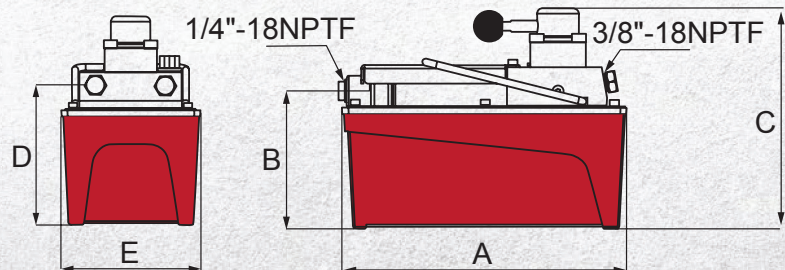

Used with Cylinder	Usable Oil Capacity (in ³)	Model Number	Pressure Rating (psi)	Oil Output Flow Rate (in ³ /min)		Input Air Pressure Range (psi)	Dimensions (in)					Weight (lbs)
				No Load	Load		A	B	C	D	E	
Double Acting	91.5	PA1500M	10,000	66	11	110-175	10.51	5.00	7.99	5.35	5.35	19.1
	231.9	PA3801M	10,000	65	11	110-175	12.64	5.04	8.03	5.31	7.36	65.0
	460.6	PA7550M	10,000	65	11	110-175	12.64	5.98	9.02	6.34	10.04	40.0