


## GE2514

## DIGITAL HYDRAULIC PRESSURE GAUGE

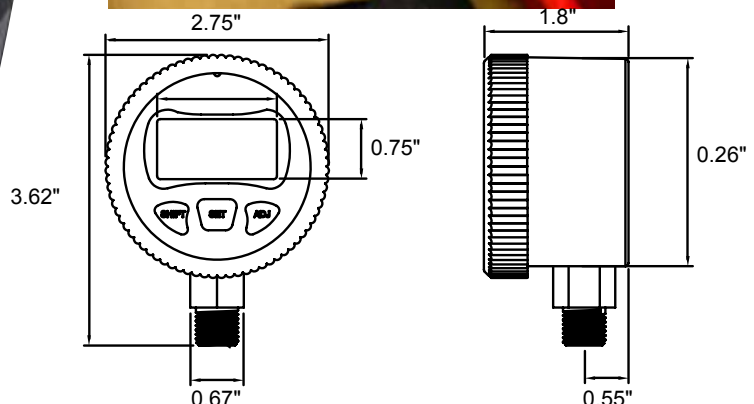

### Features:

- Back-lit display; Zero reset; displays in multiple units: psi, BAR, kg/cm<sup>2</sup>, Mpa (user selectable)
- Temperature compensated from 14°F - 140°F (-10°C~60°C)
- High precision gauge, accuracy, % of scale: ±0.5%
- 9V DC battery included
- Peak-hold functions, provides an actual pressure read out under operation
- Polypropylene housing, can be used under lightly acid and alkali working environment
- One piece sensor unit built without welds, O-ring or silicone oil
- Working temp 14°F - 140°F (non-frozen condition)  
Storage temp -4°F -158°F (F66 non-frozen condition)  
Storage humidity 35-85%
- Pressure rating: 10,000 psi



### **CF3814**

#### **Gauge Adapter**

BVA offers gauge adapter for easy gauge installation

MODEL	DIAMETER	ACCURACY	THREAD SIZE
GE2514	2-1/2" Dia.	±0.5% FS	1/4" NPT