BVA® HYDRAULICS

NEW!

BUILT TO LAST

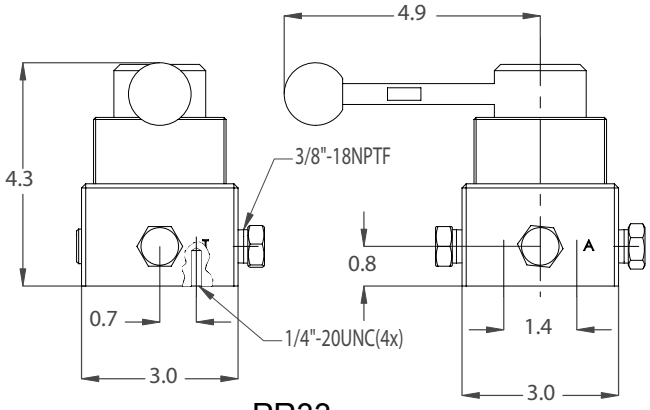
Remote Manual Directional Valves

Features:

- Designed and manufactured for safe operation to 10,000 psi
- Advance/Hold/Retract operation for use with single-acting or double-acting cylinders
- 4.5 gal/min. maximum flow capacity

PR33

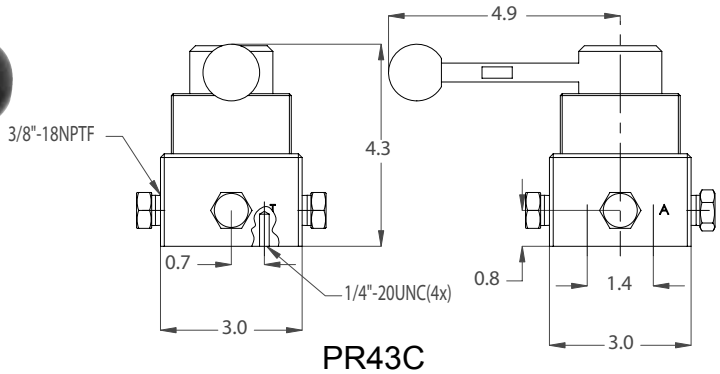












PR33

PR43C





PR43C

Valve Type	Model	Hydraulic Symbol	Schematic Flowpath		
			Advance	Hold	Retract
3-way, 3 position Tandem Center	PR33				
4-way, 3 Position Closed Center	PR43C				

SFA Companies: 10939 N.Pomona Ave. Kansas City, MO 64153 Tel.816-891-6390 Fax.816-891-6599 http://www.bvahydraulics.com