

## FLANGE SPREADERS



- Designed for heavy duty industrial environment
- Adjustable jaw width for a wide range of applications and ease of use
- Easily transported
- Can be used with any single acting pump



Model Number	Capacity (tons)	Stroke (in.)	Oil Capacity (in.) <sup>3</sup>	Maximum Flange Thickness (in.)
HFS05	5	1.00	1.00	2 X 2.3
HFS10	10	2.01	4.50	2 X 3.6

## SPREADERS

- Designed to work in confined working space
- Ideal for wedging, prying, and opening
- High strength forged steel
- Spring return for easy operation

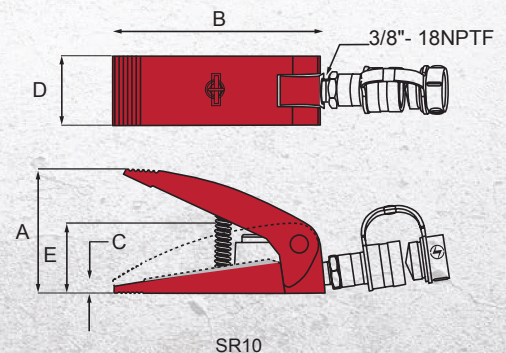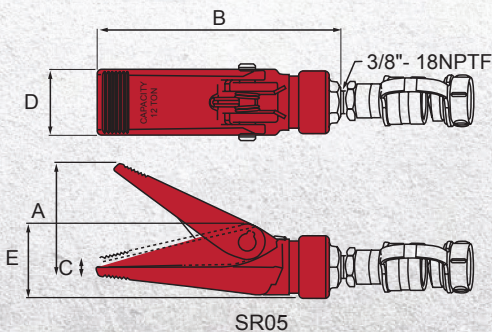

Cylinder Capacity (tons)	Model Number	Cylinder Effective Area (in <sup>2</sup> )	Oil Capacity (in <sup>3</sup> )	Dimensions (in)					Weight (lbs)
				A	B	C	D	E	
0.5	SR05	1.22	0.58	3.54	7.57	0.51	2.05	2.36	4.8
1	SR10	1.09	0.86	3.90	6.57	0.47	2.17	2.20	5.1